





- 1) ENCLOSURE IS LIGHT-WEIGHT DURABLE NON-CONDUCTIVE PLASTIC "TOOL-BOX" TYPE
- 2) UNIT IS SHORT-CIRCUIT PROTECTED
- 3) INTERNALLY MOUNTED FEATURES:
 - A) 120V AC INPUT CABLE, CONNECTS TO STANDARD 120VAC POWER DUTLET (6'-0" / 1.83m LONG)
 - B) COLOR-CODED OC OUTPUT BATTERY CONNECTION CABLES W/CLAMPS
 - C) DC AMMETER AND VOLTAGE ADJUSTMENT
 - D) INSTRUCTION SHEET PERMANENTLY MOUNTED TO INSIDE TOP COVER
- 4) SINGLE-CELL BATTERY CHARGER SHIPPING WEIGHT: 12 lbs. / 5.4 kg.

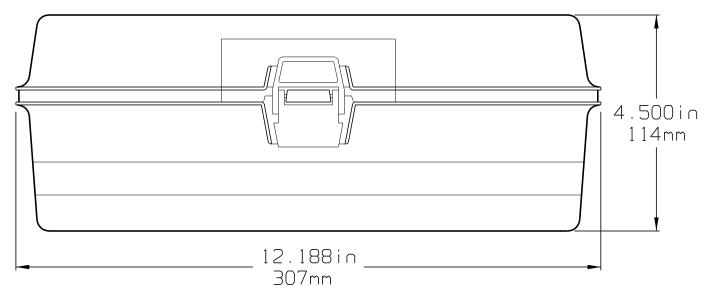

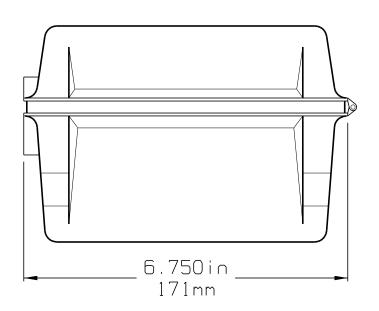

				(THIRD ANGLE PROJECTION							
				DRAWN BY	MCR	040903	TITLE	TTLE DUTLINE: SINGLE-CELL BATTER				CHARGE	ΞR
1	20380	101806		APPROVED	94	040903	DRAWING	No				REV	
0	E1207	040903	OH-	UNLESS DTHERWISE NOTED DIMENSIONS ARE IN INCHES. TOLERANCES ARE:			JE5065-00				1	$\mid \mathbf{B} \mid$	
REV	ECN No	DATE	APP				SCALE	STN	PART No	JE5065-00	ZHEE.	1 0	F 1