

STANDARD FEATURES

PROTECT YOUR OPERATION WITH HINDLEPOWER'S UNIVERSAL MAINTENANCE CHARGER.

- Prepares you for the unexpected
- You are the hero when a dc plant emergency occurs
- Connects to any input voltage 120/208/240/480 1 ϕ 60Hz
- Charges any battery, 24 through 130V
- Filtered output as a battery eliminator
- Offers instant mobility/availability

APPLICATIONS

- Power generation
- Substation/electrical distribution
- Process control
- Oil & gas
- Telecommunications
- Motive power
- Railroad
- Maintenance departments with battery responsibility

DESIGN FEATURES

- Adjustable outputs of 24Vdc, 48Vdc, and 130Vdc
- Wide voltage adjustment allows user to charge virtually any number of cells from 20V to 140Vdc.
- Mounted on hand truck for immediate mobility with lifting eyes
- AC input accepts 120, 208, 240 or 480 Vac at 60Hz, single phase
- 2% analog ammeter for monitoring ac input current
- Input circuit breaker
- 1% digital dc output ammeter
- Front panel current limit adjustment allows operation on limited input feeder.
- 1% digital dc output voltmeter, selec-table for battery or charger output
- Output circuit breaker
- 200mVrms max. ripple allows the charger to operate without a battery connected.




SPECIFICATIONS

- **AC Input Voltage:** 120, 208, 240, 480 $\pm 10\%$ 60Hz, single phase Input current limited to 70 A max.
- **Output Voltage Regulation:** $\pm 1\%$ maintained with $\pm 10\%$ line voltage and $\pm 5\%$ frequency variation along with load variation of 0-100%.
- **Transient Response:** $\pm 5\%$ for 100% load change with battery connected.
- **Front Panel Current Control:** Current limit adjustable from 10-110%.
- **Battery Charger Output Ripple:** 200mVrms without a battery connected 30mVrms with a battery Ah 4 times greater than the charger's output current rating.
- **Operating Environment Conditions:** 32°-104°F (0-40°C), 5-95% humidity (non-condensing), below 3300 feet altitude.
- **Storage Environment Conditions:** 20°-160°F (-29-71°C).
- **Protection:** Input and output circuit breakers rated at 5KAIC 480V input fused at 200KAIC.
- **Finish:** ANSI 61 baked epoxy paint and galvanized.

ORDERING INFORMATION		
MODEL	OUTPUT V	PART
25A	20-140	BB0443-00#
50A	20-140	BB0443-01

OUTLINE & DIMMENSIONS

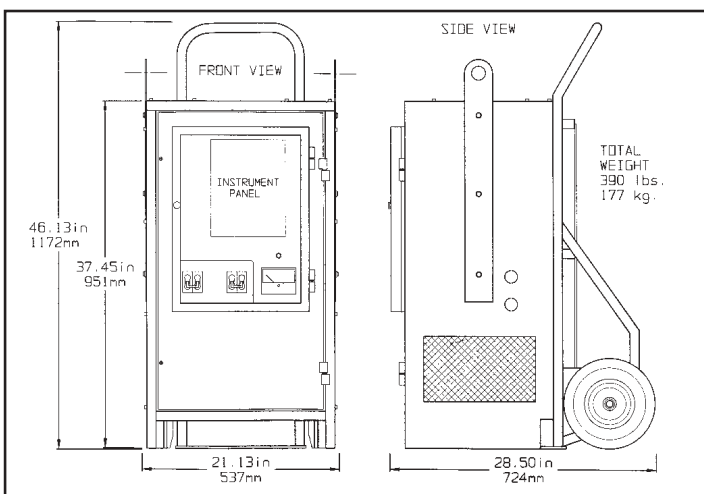

Specifications subject to change.

Standard Product Literature Available from HindlePower:

Product	Brochure
AT10.1 Battery Chargers	JF5006
Custom Power Supplies	JF5013
Custom Power Supply	JF5011
Lineups SCR/SCRF Battery	JF5010
Chargers Single-Cell Battery	JF5007
Chargers Swordfish Series	JF5009
Battery Chargers System	JF5012
Monitor	
Universal Maintenance Charger	JF5008