

DATA SHEET

Part #

7072211001

GMT Fuse Panel -/+24 to 48V DC

Positions Per Bus
10

Max Per Position
15 Amps


Bus Capacity
65 Amps



GENERAL		
Dimensions	19.00" W x 1.75" H x 11.250" D	
Rack Space	1U	
Weight	5.5 lbs.	
Mounting	Universal 19" or 23", WECCO or EIA	
Mtg. Pos.	Flush, 4" or 5" Offset	
Finish	Black Textured Powder Coat	
ELECTRICAL		
Input	Nominal Voltage	-/+24-48V DC
	Voltage Range	-/+19-60V DC
	Number of Buses	2
	Intr. Device Rating	80 Amps
Output	Max Fuse Rating	15 Amp
	Continuous Load Rating	10.5 Amps
ALARMING		
Indicators	Green (Power)/Red (Alarm)	
Function	Form C relay contacts for remote fuse and power fail indication	
Conn. Type	Solderless Wire Wrap (18 to 30 AWG)	
Rating	DC 30W/AC 50VA	

CONNECTIONS		
Input	Type	Set Screw Input
	Wire Range	Up to 1 AWG
	Max. Terminal Width	No Terminals Required
	Tightening Torque	22 in-lb (2.5 Nm)
Output	Connection Type	Set Screw Output
	Wire Range	12 to 22 AWG
	Max. Terminal Width	No Terminals Required
	Tightening Torque	5 in-lb (.5 Nm)
Ground Bus	2 Hole Lug	1/4" stud x 1" spacing
	Wire Range	6 AWG lug supplied with panel
ENVIRONMENT		
Short Term Op Temp	-40° C to +70° C	
Ambient	Up to 65° C	
Store Temp	-40° C to +70° C	
Humidity	0 to 95% non-condensing	
Power Dissipation	22.36 Watts max	
STANDARDS		
Safety (Listed)	UL 60950-1/UL 1801/CSA C22.2 No.60950-1/EN 60950-1/IEC 60950-1	
Telcordia	NEBS Level 3 (GR-63/GR-1089) and GR-3108 Class 3 (w/o salt fog testing)	

10A/10B GMT Fuse Panel, Set Screw Input and Output 7072211001

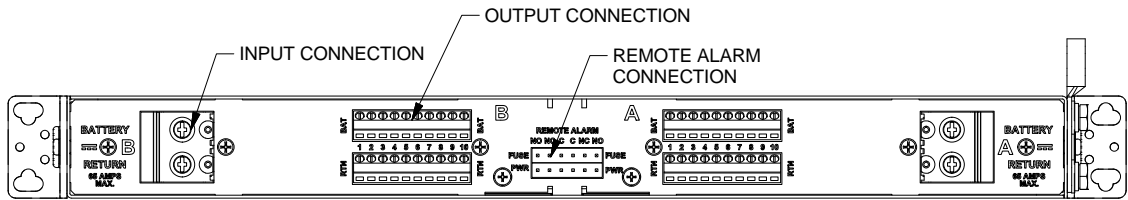

REAR VIEW ROTATED

